

HENRIKSEN HOOKS



HCH(T) CRANE HOOKS



U
S
E
R

M
A
N
U
A
L

Rev.: A1

M000142



REDUCING OPERATIONAL RISK


Phone: +47 33 37 84 00
hooks@hhenriksen.com
www.henriksenhooks.com



HCH(T)


LAUNCH

- 1 Check the following before launch:
 - the hook is securely attached to the crane wire
 - the reset lever (reset knob at HCH 1,5) is in the closed position
 - the hook element is in closed position
 - the hook is free of any impurities or ice

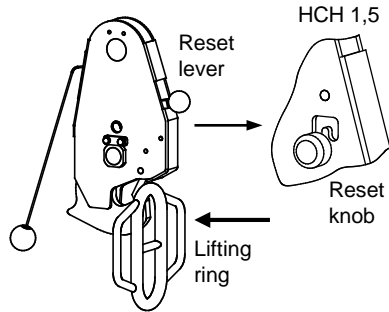


- 2 Place the lifting ring properly into the jaw of the hook.

- 3 Start the lowering process with a continuous motion.

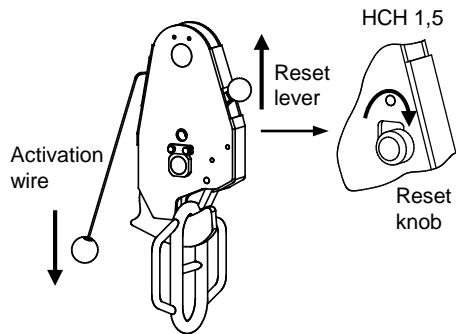

- 4 When the boat is close to the water surface, pull the ball at the end of the activation wire. Make sure that the reset lever (reset knob at HCH 1,5) moves to activated / open position.

- 5 When the boat is waterborne and the hook is off-loaded, the hook will open automatically and release the lifting ring.

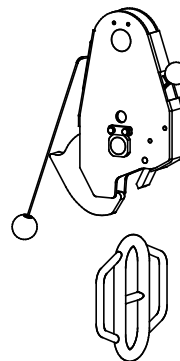


L
A
U
N
C
H


HCH(T)

RESET

- 1 Set the reset lever (reset knob at HCH 1,5) to the closed position, confirmed by a click sound.

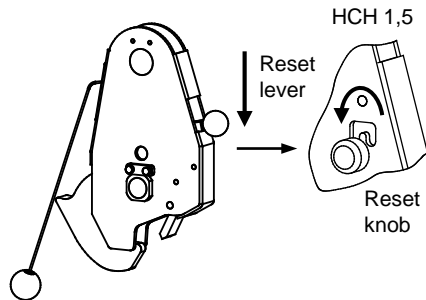


- 2 Set the hook element manually to closed position, confirmed by a click sound.

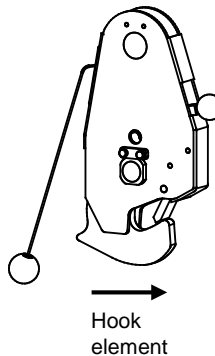

- 3 Make sure that you can clearly see the activation latch in the inspection hole, refer to the illustration.*

* HCH 1,5:
Check that the reset knob is properly in the closed position.

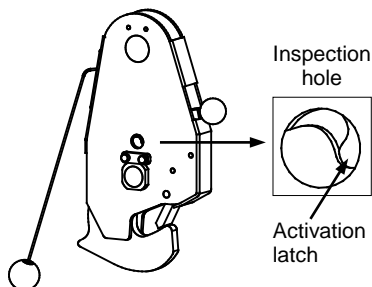


R
E
S
E
T




HCH(T)

RECOVERY

- 1** Make sure that the hook is reset.
Place the lifting ring properly into the jaw of the hook.



- 2** Make sure that the latch is completely locked, refer to the illustration.
The hook is ready to recover the boat.

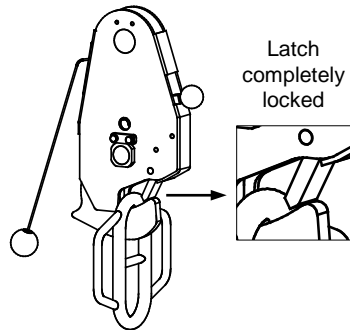


RECOVERY

HCH(T)

GENERAL CONSIDERATIONS

- 1** We recommend to keep the weight of the crane hook arrangement as low as possible to ensure a lightweight and safe operation environment. Henriksen top attachments are available, such as shackle and thimble.
- 2** We strongly recommend to use standard Henriksen Lifting Rings, because the ring dimensions are designed to **geometrically fit** together with the Henriksen Hooks.

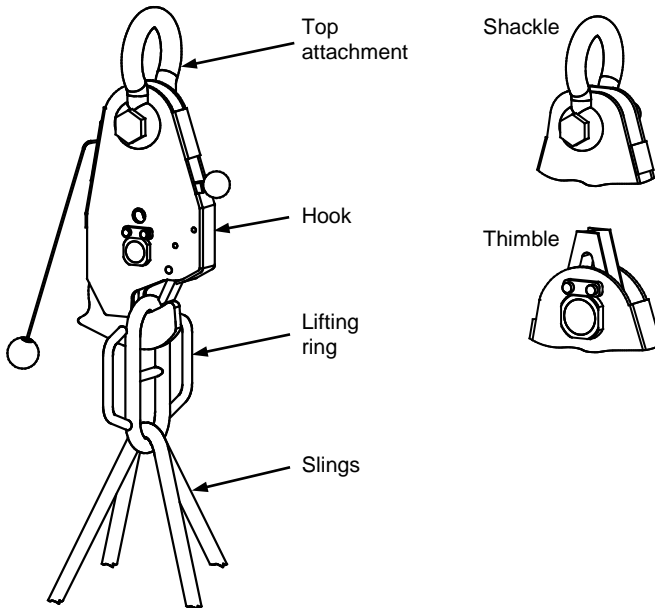

- 3** Consider the operational height and the length of the slings, make sure that the lifting hook operator can get access to the lifting hook easily and can connect the lifting ring safely.
- 4** Consider the risk of injury and/or damage the falling slings may cause when the boat gets waterborne under the launch process.

HCH(T)

FUNCTIONAL TEST

Do a functional test of the following when testing the crane hook arrangement and the lifting arrangement on the boat for the first time:


- The ring shall be inserted simply and safely.
- Safe and stable operational conditions for the hook operator
- The hook releases the lifting ring once the boat gets waterborne.

We recommend to prevent the hook against any ice to build up.

HCH(T)

**ACTIVATION WIRE REPLACEMENT
(HCHT 3,5 / HCHT 6,5 / HCHT 10)**


- 1** Set the hook in closed position and lay the hook on the side.
- 2** Remove the screw from the latch to loosen the wire. The screw is secured with Loctite 243. Be careful not to trigger the hook.

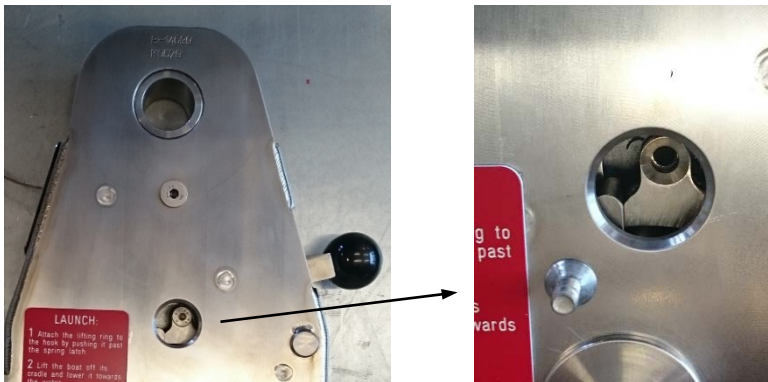

- 3** Make sure that the activation wire is not attached to the latch and pull it out.
- 4** Clean the threads on the screw and the hole of the latch - first mechanically if necessary -, and with Loctite 7063. Allow the solvent to evaporate before assembly.

HCH(T)


- 5** Insert the new activation wire into the hook through the opening on the side over the entrance pulley.

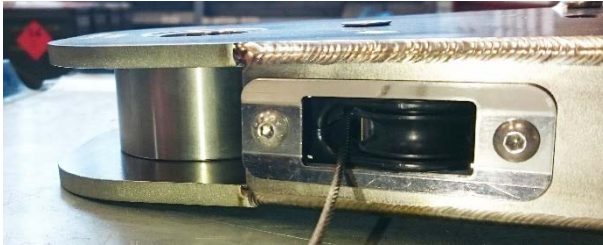

- 6** Guide the wire forward over the second pulley.



- 7** Bend the wire after the wheels and place the loop on the end of the wire inside the gap of the latch. Apply Loctite 243 onto the screw and lock the loop of the wire to the latch by hand force.


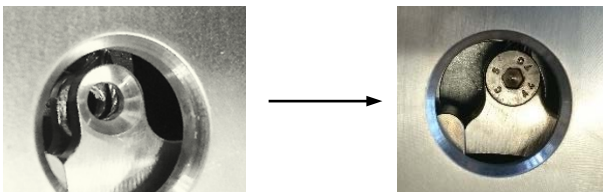


- 8** Do a functional test.



HCH(T)

- 1** For safety reasons carry out the control in good lighting conditions.
- 2** Remove all impurities (salt, grease, dust, etc.) with fresh water. Remove ice if necessary.
- 3** Check that the following parts are free from deformations and defects:

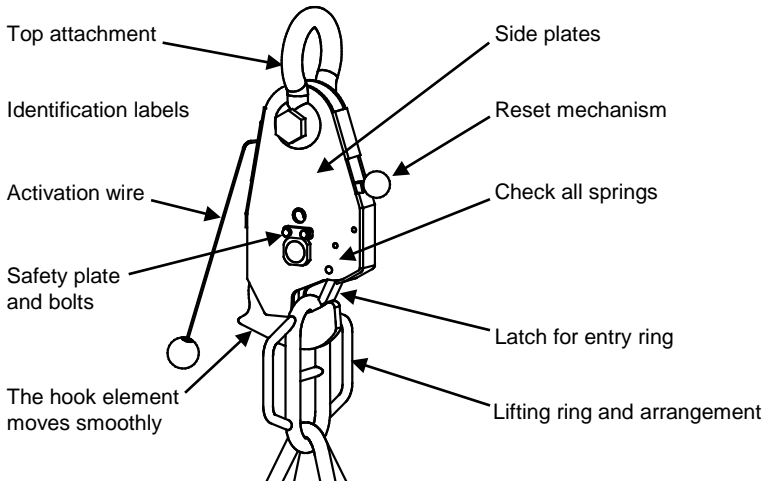

- 4** Do a functional test of the following :
 - The hook element can open fully.
 - The ring shall be inserted simply and safely.
 - The activation mechanism operates as expected.

- 5** **DO NOT PAINT ANY PART OF THE HOOK!**

Contact the manufacturer in case of any deviation!







HCH(T)

SAFE LAUNCH

1 The hook operator connects the lifting ring and the painter line before launch, and then gives a signal to the crane operator that the lowering process can start.




2 The crane operator starts the lowering process with a continuous motion.

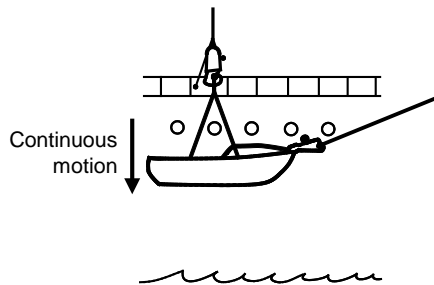

3 The operators make sure that there are no obstacles under the boat.

The hook operator then activates the crane hook when the boat is close to the water surface.

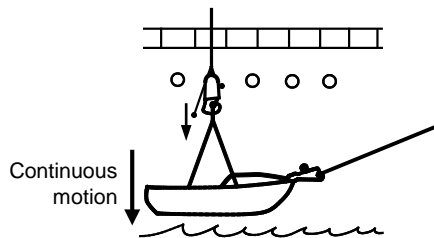

4 The hook operator stands back and takes a safe stand-by position.

S
A
F
E

U
S
E




HCH(T)


SAFE LAUNCH

- 5** When the boat gets waterborne and the crane hook is off-loaded, the hook will open automatically and release the lifting ring.

The crane operator lifts the crane hook to avoid collision with the boat or the crew.



- 6** The coxswain or the hook operator releases the painter line when the boat and the crew is ready.



- 7** The coxswain maneuvers the boat ahead and away from the vessel.

SAFE USE



HCH(T)

SAFE RECOVERY

1 The vessel crew make sure that the crane hook is reset and securely attached to the crane wire.
The hook operator makes sure that the lifting arrangement on the boat is ready and that the painter hook is reset.

2 The coxswain maneuvers the boat close to the vessel to let the hook operator safely get the painter line.




3 The hook operator connects the painter line.

4 The coxswain reduces the speed of the boat to get in the correct position below the crane hook.

The hook operator takes a safe operating position.

5 The crane operator lowers the crane hook to let the hook operator safely get it.

The hook operator gives a signal to the crane operator when the crane hook is in the correct operational position.



S
A
F
E

U
S
E




HCH(T)

SAFE RECOVERY


6 The hook operator connects the lifting ring, and gives a signal to the crane operator.

The crane operator starts the automatic tensioning system (if available) to give tension in the wire.




7 The hook operator stands back and takes a safe stand-by position.

8 The crane operator starts the lifting process with a smooth motion as the boat moves upwards on a wave.

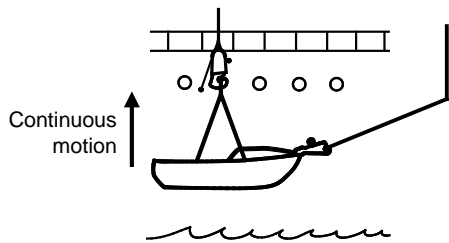

9 The crane operator completes the lifting process with a continuous motion and places the boat into the crib.



**S
A
F
E

U
S
E**